

# Apach

COOK *line*

## **APACH 700 SERIES 2 HOTPLATES RANGE ELECTRIC APRE-47QP/PL**



### **TECHNICAL DATA:**

External dimensions - WxDxH (cm)	40x71,4x85
Nr. Plates 2,5 kW	2
Total power (kW)	5


### **ADDITIONAL TECHNICAL DATA:**

Supply (N)	400V 3N 50/60Hz
Weight (kg)	58
Volume (m3)	0,4

The cast iron fast-heating hot plates with safety device to prevent overheating are watertight fixed to the worktop. They are available in three versions: rounded with diameter 145/200 mm and power 1.5 kW and 2.6 kW; squared with dimension 220x220 mm and power 2,6 kW; lowered with dimension 300x300 mm and power 2,5 kW. Indicator lights show when each hotplate is working. 1 mm worktop in AISI 18/10 stainless steel. Excellent alignment with joints.

#### Versions with oven:

Stainless steel cooking chamber with enameled bottom, stainless steel double-wall door with insulating casing. Electric oven: 5.3 kW (2,6 kW for ventilated oven) stainless steel armoured heating elements placed on the bottom and on the top of the cooking chamber; thermostatic temperature control with separate bottom/top temperature control for maximum cooking flexibility. 3 GN 2/1 rack support (static oven) and 3 GN 1/1 rack support (ventilated oven).

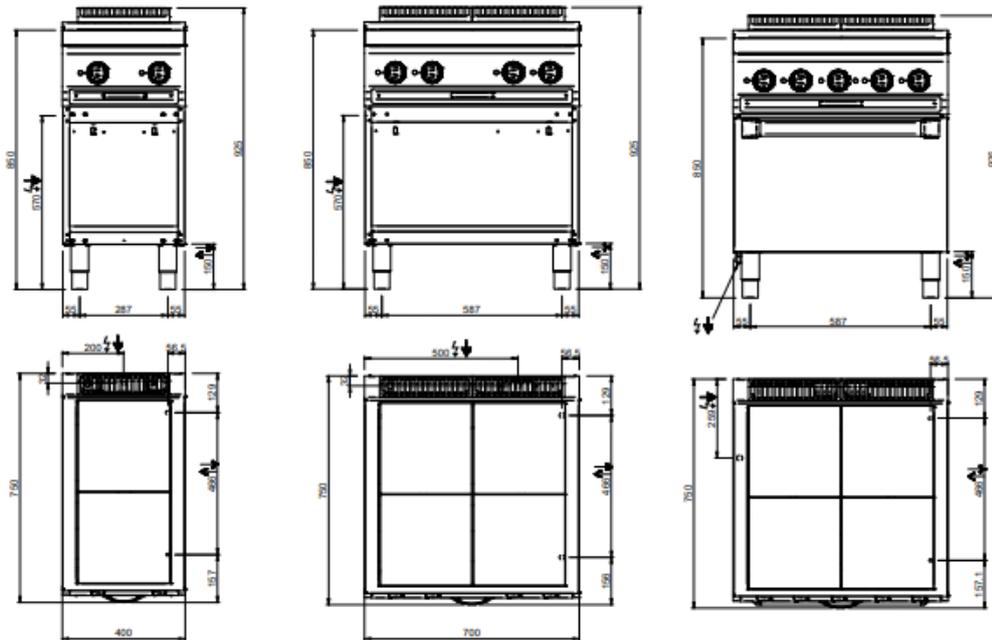

LEGENDA SIMBOLI / LEGEND

 INGRESSO GAS / GAS INLET  
(EN 10226-1) Ø M 1/2"

 ALIMENTAZIONE ELETTRICA /  
POWER SUPPLY

 INGRESSO ACQUA /  
WATER INLET Ø M 1/2"

 SCARICO ACQUA / OLII  
WATER / OILS DRAIN

 ATTACCO EQUIPOTENZIALE /  
EQUIPOTENTIAL

 REGOLAZIONE PIEDINI /  
FEET ADJUSTMENT (h 0/+50)  
/ TOP VERSION (h 0/+5)